

Bravura®



Specifications:

| | | | |
|-----------------------|--|----------------|--|
| Door Prep | Cross bore: 2-1/8" Edge bore: 1" Latch Face: 1" x 2-1/4" | Latches | 2-3/8" Standard and 2-3/4" Optional Faceplate: 1" x 2-1/4" round corner Bolt: 1/2" Solid Brass throw Drive-in or UL Available |
| Backset | 2-3/8" Standard and 2-3/4" Optional | Strikes | Supplied with full lip round corner (9103) and square corner strikes (9102) |
| Door Thickness | 1-3/8" ~ 2", 2-1/4" & 2-1/2" Extension Kits Available | | |

905G-1 OXFORD

Shown in Satin Nickel
with Rectangle Trim

G-1 RECTANGLE

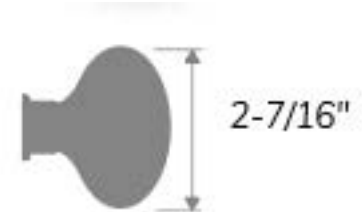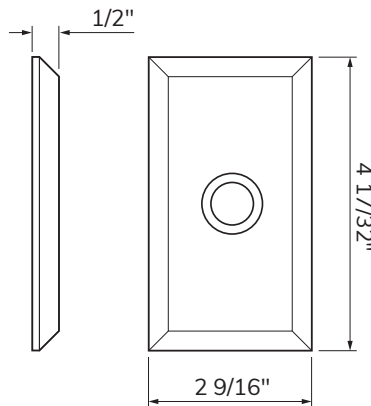

| Function | Finish | CTN Qty | Item No. |
|----------|---------------------------|---------|-----------|
| Passage | Oil Rubbed Bronze (US10B) | 12 | BV905108 |
| | Satin Nickel (US15) | 12 | BV905107 |
| | Black (US19) | 12 | BV905-105 |
| | Polished Chrome (US26) | 12 | BV905-103 |
| Privacy | Oil Rubbed Bronze (US10B) | 12 | BV905118 |
| | Satin Nickel (US15) | 12 | BV905117 |
| | Black (US19) | 12 | BV905-115 |
| | Polished Chrome (US26) | 12 | BV905-113 |
| Dummy | Oil Rubbed Bronze (US10B) | 12 | BV905128 |
| | Satin Nickel (US15) | 12 | BV905127 |
| | Black (US19) | 12 | BV905-125 |
| | Polished Chrome (US26) | 12 | BV905-123 |