


# CALLAN®

## Specifications

<b>Door Prep</b>	Cross bore: 2-1/8" Edge bore: 1" Latch face: 1" x 2-1/4"	<b>Latches</b>	Deadbolt: 2-3/8" & 2-3/4" adjustable (C9092 R/S) Faceplate: 1" x 2-1/4" Rd. & Sq. corner Bolt: 1" throw with hardened steel rod
<b>Backset</b>	Fits 2-3/8" and 2-3/4"	<b>Strikes</b>	2-1/4" full lip Rd. & Sq. corner (9118 R&S) Includes Reinforcement Strike.
<b>Door Thickness</b>	1-3/8" ~ 1-3/4" door standard, 2-1/4" Ext. Kit available	<b>Wood Screws</b>	Combination screws that suit both wood or metal door mounting Includes 3" Security Screws
<b>Cylinder</b>	SC1 5-pin standard; KW1 5-pin optional Deadbolts packed KA5	<b>Features</b>	Protective collar High Security Strike Plate Interlocking installation guides Reinforced spring assembly

## GRADE 2 ROUND

Shown in Satin Nickel

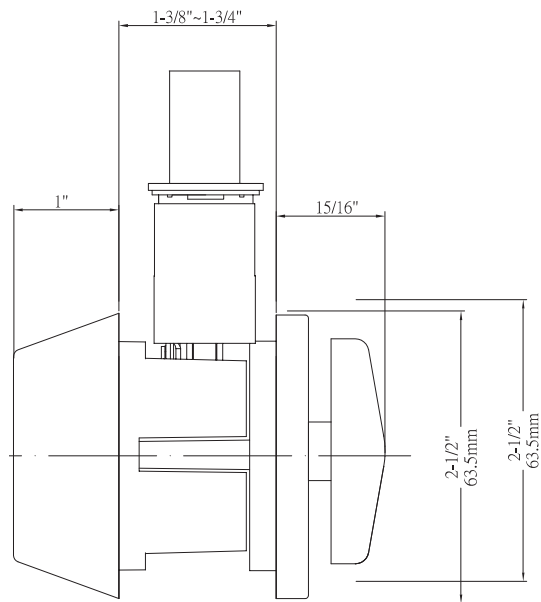

## BOX PACK

Model	Function	WT/ LB	CTN QTY		US15 Satin Nickel	US10BE Edged Bronze	US19 Black
200S-G2	Single Cylinder	19 lb	10 Pcs	Item No.	G2KA2001	G2KA2007	G2KA2004
				List Price	\$44	\$44	\$44

## VISUAL BOX PACK

Model	Function	WT/ LB	CTN QTY		US15 Satin Nickel	US10BE Edged Bronze
VB-200S-G2	Single Cylinder	23 lb	10 Pcs	Item No.	VBG2KA2001	VBG2KA2007
				List Price	\$48	\$48