


# CALLAN®

## Specifications

<b>Door Prep</b>	Cross bore: 2-1/8" Edge bore: 1" Latch face: 1" x 2-1/4"	<b>Latches</b>	Entrance: 2-3/8" and 2-3/4" adjustable (C9060 R/S) Passage/Privacy: 2-3/8" and 2-3/4" adjustable (C9064 R/S) Faceplate: 1" x 2-1/4" Rd. and Sq. corner Bolt: 1/2" throw
<b>Backset</b>	Fits 2-3/8" and 2-3/4"	<b>Strikes</b>	1-3/4" x 2-1/4" full lip Rd. and Sq. corner (9103 and 9102). Includes Reinforcement Plate
<b>Door Thickness</b>	1-3/8" ~ 1-3/4" door standard 2-1/4" Ext. Kit available for Pass/Priv Only	<b>Wood Screws</b>	Combination screws that suit both wood or metal door mounting. Includes 1-1/2" Security Screws
<b>Cylinder</b>	SC1 5-pin <b>standard</b> ; KW1 5-pin optional Entries packed KA5	<b>Grade 2 Features</b>	Full protection collar, Interlocking installation guides, Reinforced spring assembly
<b>Door Handling</b>	Reversible lever handing required for dummy function and handleset interior		

## NOLAN GRADE 2

Shown in Satin Nickel

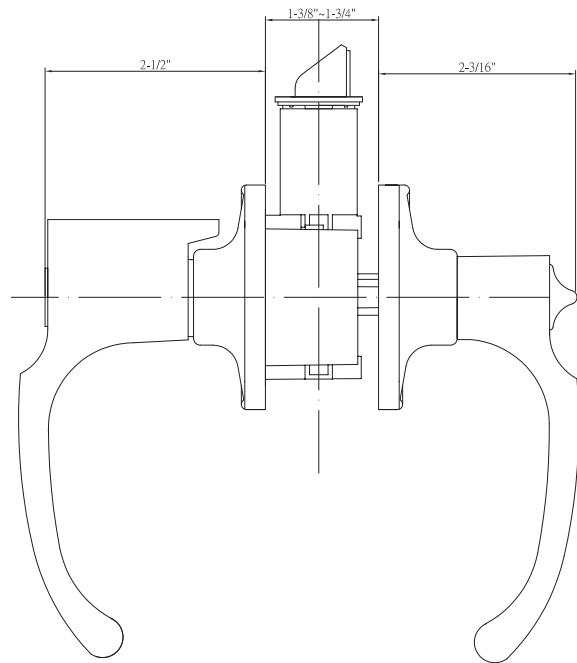

## BOX PACK

Model	Function	WT/ CTN	CTN QTY		US15 Satin Nickel
500T-NE-G2	Entrance	21 lb	10 Pcs	Item No.	G2KN5001
501T-NE-G2	Passage	18 lb	10 Pcs	Item No.	G2KN5011
502T-NE-G2	Privacy	21 lb	10 Pcs	Item No.	G2KN5021
515-NE	Dummy	15 lb	20 Pcs	Item No.	KN5051