




Specifications

Door Prep	Cross bore: 2-1/8" Edge bore: 1" Latch face: 1" x 2-1/4"	Latches (6-Way Available)	Entrance: 2-3/8" and 2-3/4" 6-way adjustable (9073) Passage/Privacy: 2-3/8" and 2-3/4" 6-way adjustable (9074) Faceplate: 1" x 2-1/4" round corner Bolt: 1/2" throw
Backset	Fits 2-3/8" and 2-3/4"	Strikes	1-3/4" x 2-1/4" full lip round corner (9103)
Door Thickness	1-3/8" ~ 1-3/4" door standard	Wood Screws	Combination screws that suit both wood or metal door mounting
Cylinder	KW1 5-pin standard SC1 5-Pin optional. Entries packed KA5		

OLIVIA

Shown in Stainless Steel

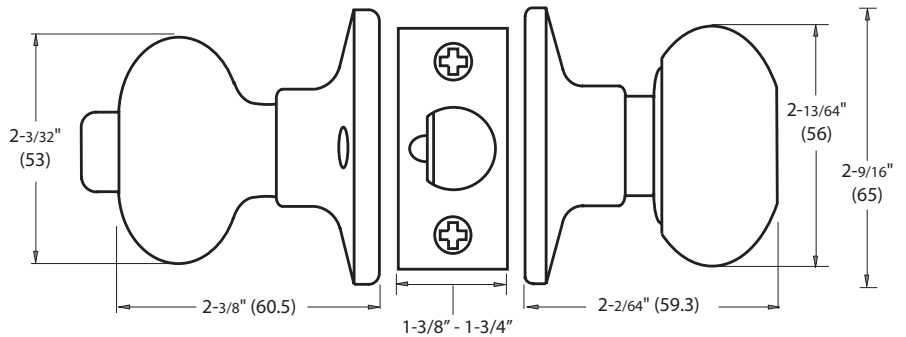

BOX PACK

Model	Function	WT/LB	CTN QTY		US32D Stainless Steel	US19 Black	US12P Tuscany Bronze
100T - OL	Entrance	27 lb	20 Pcs	Item No.	D11422	D11429	D11427
101T - OL	Passage	22 lb	20 Pcs	Item No.	D14422	D14429	D14427
102T - OL	Privacy	22 lb	20 Pcs	Item No.	D12422	D12429	D12427
115 - OL	Dummy	9 lb	20 Pcs	Item No.	D15422	D15429	D15427

1.800.952.4430 | orders@delaneyhardware.com | delaneyhardware.com